



Tekskil DirectVIEW Teleprompter Upgrade

Convert your DirectVIEW System to a Complete Studio System


Using a teleprompter allows you to speak to your audience with uninterrupted eye contact. Looking away from the center of the screen can make you appear awkward or suspicious. The DirectVIEW System places the lens just over the top of the prompter causing the talent to look down rather than at the target audience.

Tekskil's innovative modular construction enables you to easily reconfigure a DirectVIEW System to an on-camera Studio Prompter. Changing is as simple as disconnecting the DirectVIEW display from the quick release plate and attaching either of our Pro or **LED Premium Series** Prompters. The DirectVIEW monitor is now utilized as a Talent Assist/Aux monitor. Two different hood configurations are available to provide a perfect match to any camera and lens combination. To make this deal even better, Tekskil offers full trade-in credit for the DirectVIEW truss that's no longer needed. Everything else in the DirectVIEW System is reused!

Convert this:



To this:

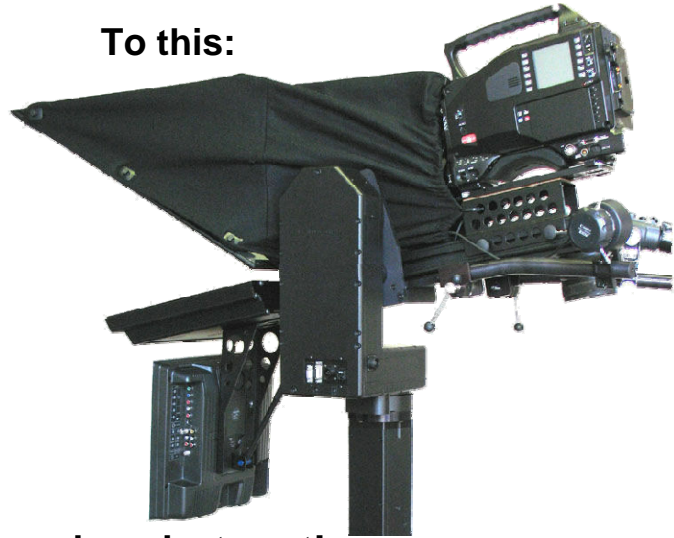

Without fuss and modest cost!

- Tekskil prompters are serious all-metal professional grade products – Premium Series feature extruded metal enclosures for maximum strength or a folded lightweight metal enclosure for Robotic Systems
- Premium Series come complete with the latest technology high resolution displays having up to 1500 cd/m² (nits) of brightness and a 1000:1 contrast ratio
- Can be configured with a front mounted LED Tally light or our TallyCAM Tally Display
- The extruded metal case prompter models can support an Aux/Talent Assist panel dynamically suspended underneath the prompter and dampened free of vibration
- Affordably priced

	15E	15P	17E	17P	22P
Diagonal Screen Size (HxV):	15.0 inches (11.7" x 9")	15.0 inches (11.7" x 9")	17.0 inches (13.3" x 10.6")	17.0 inches (13.3" x 10.6")	22 inches (18.65" x 11.65")
Pixel Format (RGB):	1280 x 1024	1280 x 1024	1280 x 1024	1280 x 1024	1680 x 1050
Backlight Brightness:	CCFL 850 cd/m ²	LED 1500 cd/m ²	CCFL 850 cd/m ²	LED 1200 cd/m ²	LED 1200 cd/m ²
Contrast Ratio:	800:1	1000:1	800:1	1000:1	1000:1
Viewing Angle (H/V):	140° / 120°	170° / 170°	140° / 120°	170° / 170°	160° / 160°
Weight of display:	13 lbs.	12 lbs.	15 lbs.	14 lbs.	13 lbs.
Lamp Life:	30,000-Hour	60,000-Hour	30,000-Hour	60,000-Hour	60,000-Hour
Power Consumption:	38 W	28 W	43 W	28 W	34 Watts
Warranty:	Three Years	Five Years	Three Years	Five Years	Five Years

Set up one of our systems in your studio and see the difference for yourself

Tekskil Industries, Inc.

Phone: 604-985-2250
Visit our website at Tekskil.com

Toll Free 877-TEKSKIL (835-7545)

Toll Free Fax: 877-576-8361
Email: TekskilPrompters2011@tekstil.com